

Anker A1755

# Anker SOLIX C800X Portable Power Station

768Wh | 1200W

InfiniPower™ SurgePad™

HYPER FLASH™ TotalGuard™

*Ever Ready for Camping Trips with  
a 5-in-1 Portable Power Station*



# Highlights

## **InfiniPower™ 10 Years of Everyday Use**

LiFePO4 batteries offer a 6× longer lifespan than the average power station. Designed for a decade of daily use, with an industry-leading 5-year device warranty

## **Ever-Ready Professional Camping Lights**

Features a 3-mode camping light, including a flashlight, ambient light, and warm-toned light in one portable power station. With its IP65-rated water-resistant build and auto-recharging storage compartment, get reliable light for all your camping activities at night.

## **Strong Enough to Power 89% of Outdoor Appliances**

Increase surge power by 50% to run most appliances while camping or during power outages. Charge an iPhone 13 up to 49 times, a kettle or coffee maker (1000W) for 41 minutes, an electric stove (800W) for 52 minutes, or a CPAP machine for 17 hours.

## **HyperFlash™ Fast Recharge**

Thanks to HyperFlash™ technology, the portable power station can be recharged to 100% in 58 minutes via a wall outlet with a 1100W input, which is 17% faster than power stations with the same capacity.

## **Remote operation is hassle-free indoors and outdoors with Wi-Fi and Bluetooth**

Using the Anker app, you can monitor and control the Anker SOLIX C800X Portable Power Station with real-time visuals and set your preferred discharge limit, battery level, recharging speed, AC timing, screen brightness, and screen time.

# Features

## Proven Durability TotalGuard™

Our drop-proof design and material selection meet the requirements of industry testing standards to withstand any impact during outdoor adventures.

## Pro UPS

Ensure continuous power with Uninterruptible Power Supply (UPS)  
Switchover time in under 20ms.

## Professional Camping Lights

Features a 3-mode camping light in one portable power station. With its IP65-rated water-resistant build and auto-recharging storage compartment.

# Specifications

## Product Model

PN	A1755
Model Name	Anker SOLIX C800X Portable Power Station

## Battery Info

Type of Battery	LiFePO4
Capacity	768Wh
Capacity	240000mAh
Cycle Life	3000+ (to 80%)





# Specifications

## Power Outputs

Maximum Output	1200W
# of Output Ports	10 (For US/CA)
# of Standard AC Socket	5 (For US/CA)
AC Rated Power	1200W
AC Surge Power	1920W
AC Auto Shut-Off	Standby mode 12h
# of USB-A Output	2

USB-A Rated Power (per port)	5V=2.4A (12W Max)
USB-A Total Output	24W
# of USB-C Output	2
USB-C Rated Power (per port)	5V=3A/ 9V=3A/ 12V=2.5A (30W Max) 5V=3A/9V=3A/ 15V=3A/20V=3A/20V=5A (100W Max)
USB-C Total Output	130W
USB auto shut-off	Yes
# of Car Outlet	1
Car Outlet Rated Power (per port)	10.8~14V=10A (120W Max)

# Specifications

## Power Inputs

Input Voltage	100-120V (US/CA)	EST DC Adapter Recharge Time	7.2 hrs (120W Car Charger)
Total Input Power	1100W (AC Direct)	DC Input Size	XT-60
EST Recharge Time	Default AC recharging: 90min(750W) Ultra Fast AC recharging: 58min(1100W) Car socket recharging: 7.2h(120W) Solar recharging: 2.8h(300W)	Solar Input Power	11-60V $\approx$ 10A(300W Max)
Use Ports While Recharging	Yes	EST Solar Recharge Time	8.3 Hours(1*100W) 4.2 Hours(2*100W) 2.8 Hours(3*100W) 4.2 Hours(1*200W)
Direct AC Input	Yes	Solar Panel Compatible	Yes
Maximum AC Input Power	1100W	MPPT Support	Yes
# of DC Input	1		
DC Adapter	No		

Sales Market: US/CA

# Specifications

## Illumination Information

Flash Light	-
Flash Light Mode	-
Ambient Light	Yes
Ambient Light Mode	Ambient Light Mode (3 Level) SOS Mode

## Safety Information

Operation Temperature (°C/°F)	Charging: -20 -40°C / -4 -104°F Recharging: 0-40°C / 32-104°F
Overload Protection (AC)	>1920W
Over-current Protection (USB-A)	>2.4A
Over-current Protection (USB-C)	>3.6A (30W) >6A (100W)
Over-current Protection (Car Port)	>10A

## Package Content

AC Adapter	-
Cable	AC Charging Cable 120cm Car Charging Cable 300cm Solar Charging Cable (1 to 2) 170cm


## Weight & Dimension

Product Dimension	371x205x253 mm 14.6x8.07x9.96 in
Packaging Dimension	451x274x300mm 17.8x10.8x11.8 in
Product Weight	10.5 kg ; 23.15 lb
Product Weight with Package	12kg ; 26.46 lb

# Specifications



X2

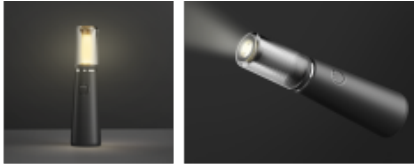

X1



## Light Information

3-in-1Light Modes	Flash Light mode / Candle light mode
	Ambient light mode
Brightness	200lm Max
Battery Capacity	2600mAh
Run Time	8-130hrs
Recharge Time	4hrs
Waterproof Level	IP65
Size	140*36*36mm
Weight	115g

## Hanger Pole Information

2-IN-1 design	Lantern Stand / Pole Tripod
SPEC	Length: 100cm Max / Weight: 142g