

# Anker SOLIX F2600 Portable Power Station

Smart and Portable Power for Everyday Use

2,560Wh | 2,400W




Email: [eco-power-solutions-us@anker.com](mailto:eco-power-solutions-us@anker.com)

Note: Product specifications and details are subject to change without notice. Refer to the Anker SOLIX official website for current and accurate information.



Website

## | Anker SOLIX F2600 Portable Power Station

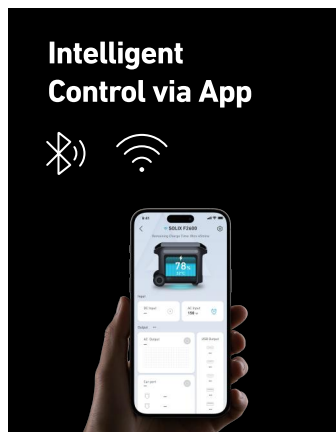

	F2600 Portable Power Station	BP2600 Expansion Battery
Capacity		
Capacity	2,560Wh	2,560Wh
Extra Battery Capacity	2,560Wh	/
Maximum Extra Batteries	1	/
Output		
AC Rated Power	2,400W	/
SurgePad™ Power	3,600W	/
AC Voltage	120V	/
Output Ports	12	/
AC Outlets	4× AC, 1× TT-30R	/
USB-A Output	2× 12W	/
USB-C Output	3× 100W	/
Car Socket Outlet	2 × 120W	/
Input		
AC Input Power	1,440W Max	/
DC Inupt Ports	1	/
Solar Input Power (MPPT)	1,000W Max	/
Car Charging Input	120W	/
Other Specifications		
Battery Type	LFP	LFP
Battery Life Cycle	80% Efficiency After 3,000 Cycles	80% Efficiency After 3,000 Cycles
Dimensions	20.7 × 15.5 × 9.8"	17.4 × 10.6 × 9.4"
Product Weight	69.7 lb	48.1 lb
Light Bar	Yes	/
Smart App Control	Yes (Bluetooth, WLAN)	/
UPS	20 ms	/